


SIMPLE SAVER SYSTEM® INSTALLATION INSTRUCTIONS

BY THERMAL DESIGN

RAFTER BRACE DETAILS

These fastening methods are routinely approved by building manufacturers for use with liner systems. Tip: Specify one of these options when ordering the building. If this is not possible, call the building manufacturer's engineering department for the number of fasteners needed to attach the braces or brace clips. These methods preserve the integrity of the high quality vapor retarder membrane. Brace clips (Detail A) are available from Thermal Design. Contractor is to verify the use of these connections with the building manufacturer. The manufacturer's standard method, if different from above, can be utilized but may require additional sealing materials.

Figure 1-14.

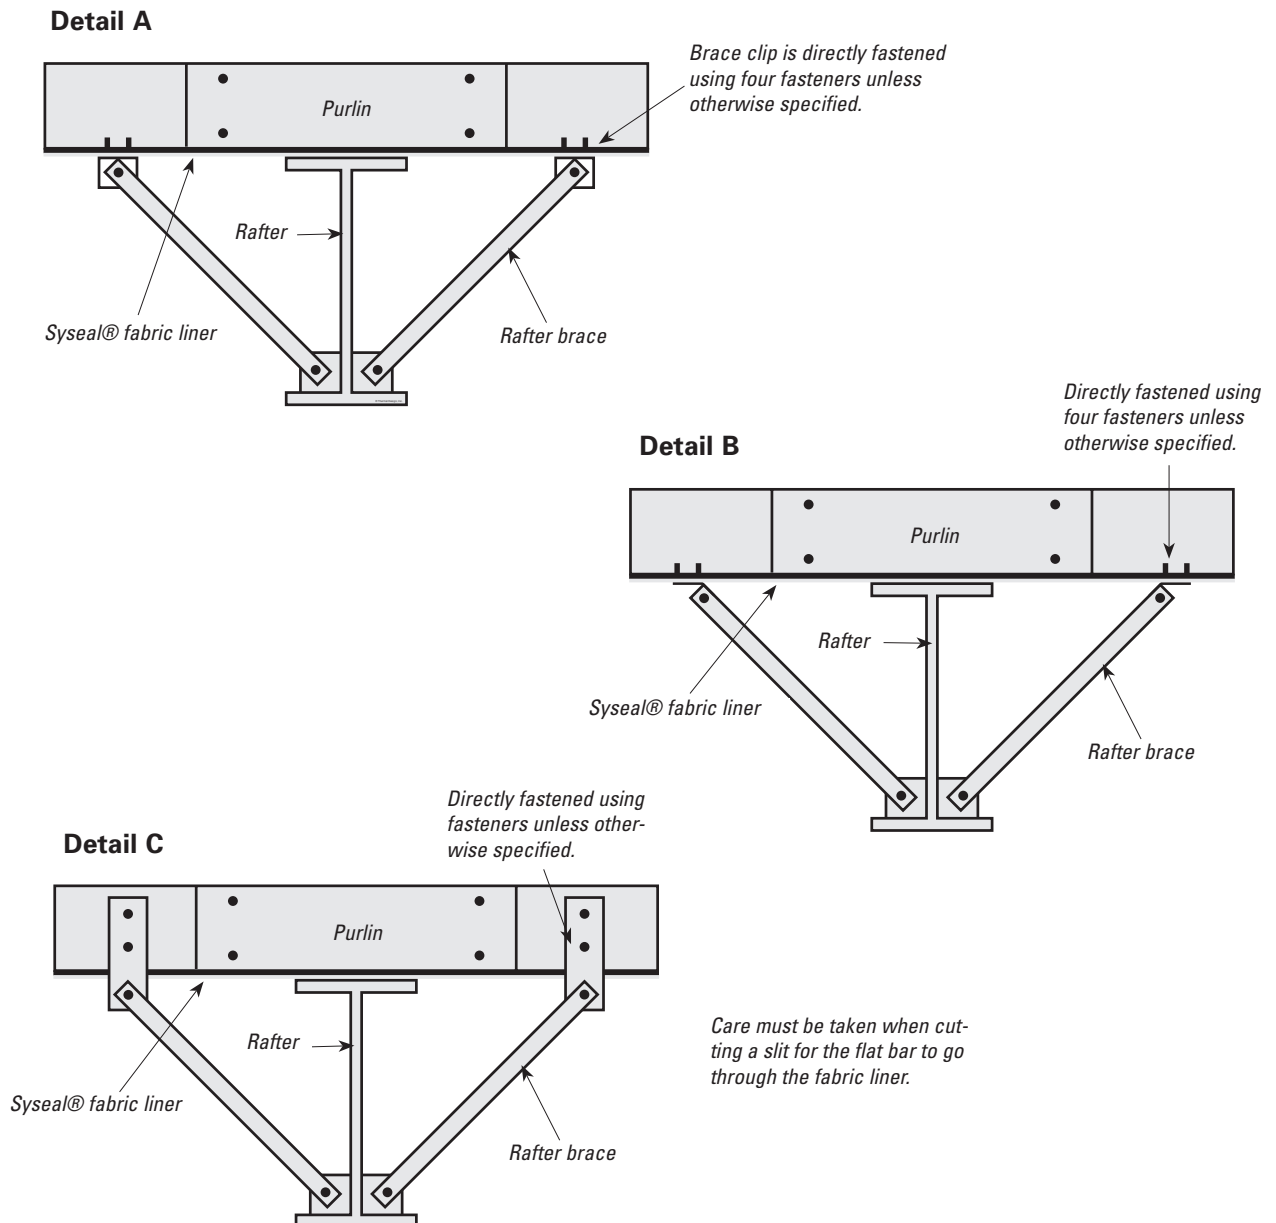


SIMPLE SAVER SYSTEM® INSTALLATION INSTRUCTIONS BY THERMAL DESIGN

MINIMUM BRACE CLIP DETAILS

IMPORTANT NOTICE: CONSULT YOUR BUILDING MANUFACTURER FOR BRACE CLIP STRUCTURAL REQUIREMENTS BEFORE INSTALLATION AND USE OF THESE ALTERNATIVE BRACE CLIPS.

MANY BUILDING MANUFACTURERS HAVE THEIR OWN PREFERRED BRACE CLIP DESIGNS FOR USE WITH LINER SYSTEMS.

Figure 1-15.

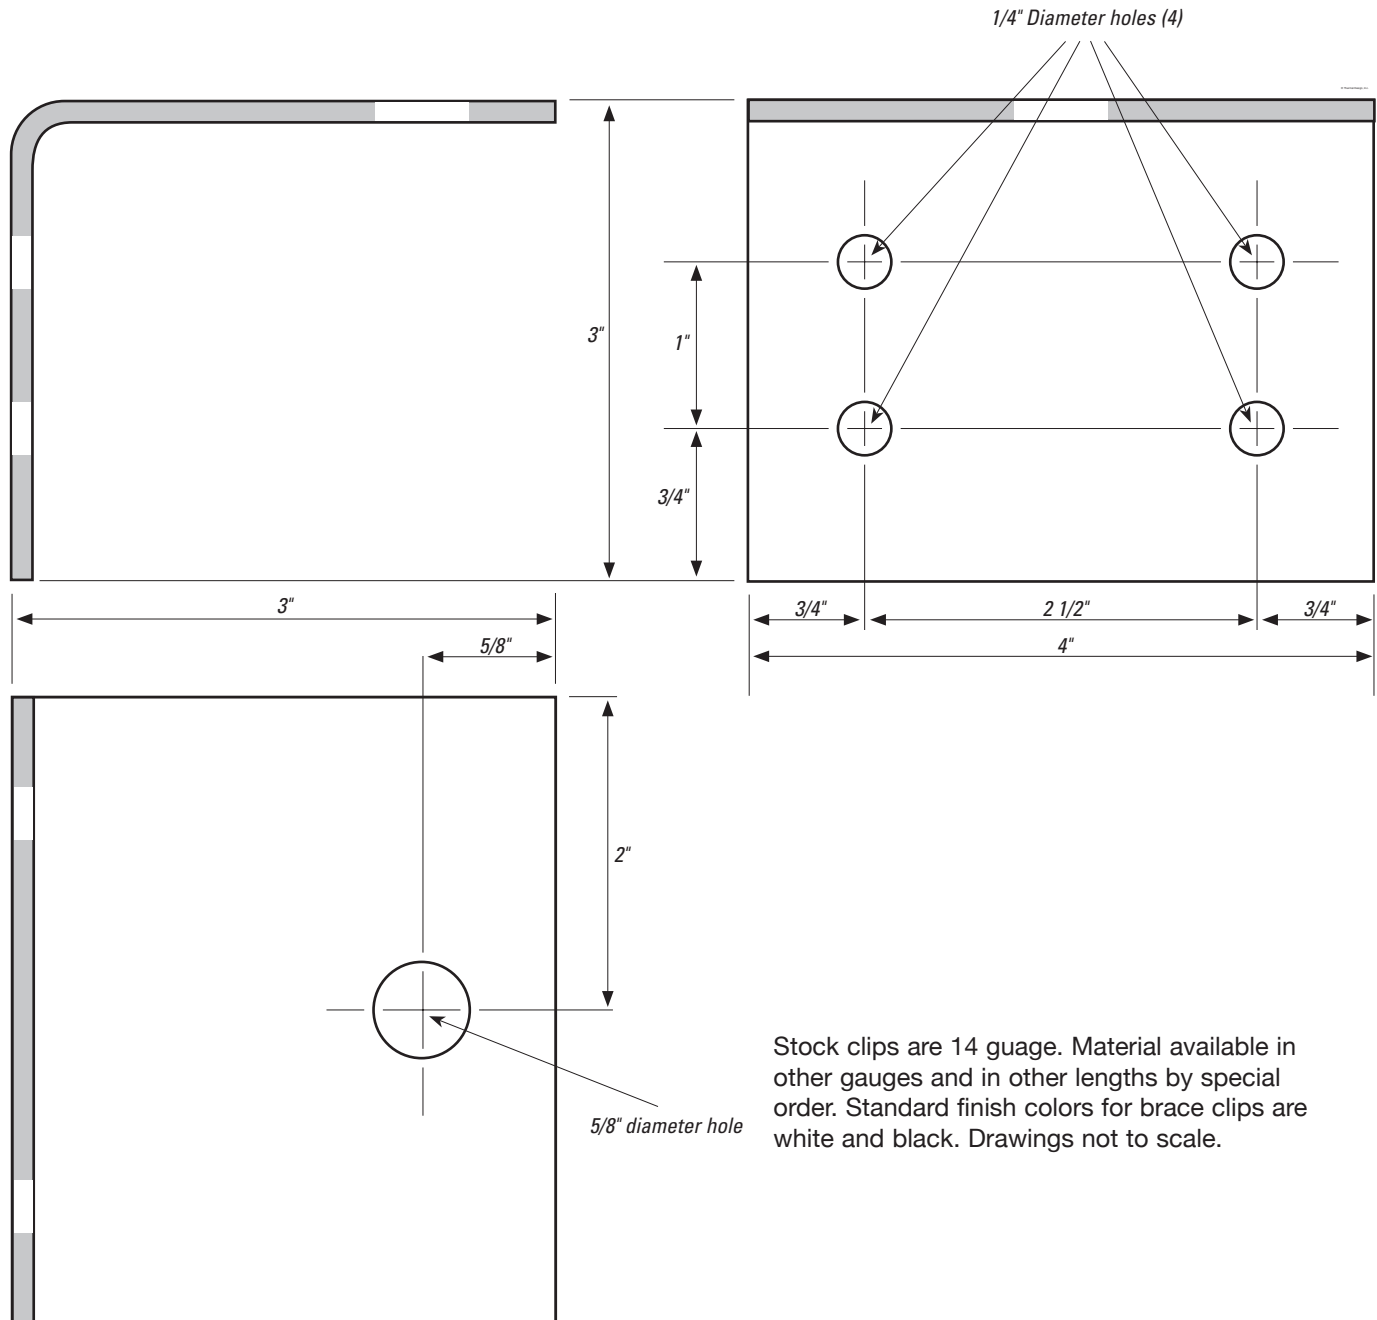

Stock clips are 14 gauge. Material available in other gauges and in other lengths by special order. Standard finish colors for brace clips are white and black. Drawings not to scale.